

# DCP-108

8 channel transponder for QSFP28 transceivers




## HIGH-DENSITY TRANSPONDER

In 100G DWDM configurations where it is not feasible to embed the PAM4 QSFP28 transceivers directly in the switch, or when setting up a demarcation point in an operator's network, the DCP-108 eight channel open transponder is the ideal solution. Equipped with PAM4 QSFP28 transceivers, the DCP-108 is the ideal product for terminating 100G services in a cost-efficient way at the subscriber premises. The DCP 108 has support for 40G with QSFP+ on the client side and PAM4 on the line side as well as for 100G with QSFP28 on the client side and PAM4 on the line side. This includes support for any type of QSFP28 client type (with and without FEC) in a high density (1.6 Tbit/s in 1U) module at a very low cost per Gbit. In addition to the use as transponder, the DCP-108 can also be used as repeater or media converter.

It is also possible to transport 10GbE, 25GbE and 32G FC via a QSFP28 to SFP/SFP+/SFP28 converter.

## DCP-108 IN SHORT

- Addresses two principal cases
- Switches and routers without PAM4 support
- Wholesale providers in need of demarcation
- Support for PAM4 on line side and any type of QSFP28 client:
  - With and without FEC
  - 40G with QSFP+
  - 100G with QSFP28
- 10GbE, 25GbE and 32G FC via QSFP28 to SFP/SFP+/SFP28 converter
- High density (1.6Tbps in 1U)

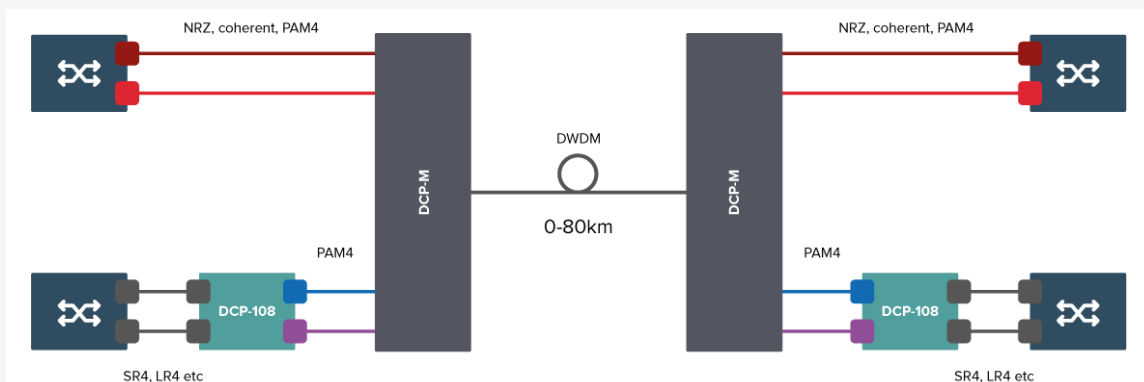

## ORDERING INFORMATION

Part number	Description
DCP-108	8 channels, 40 & 100Gbps, Transponder, QSFP28 to QSFP28

## TECHNICAL SPECIFICATIONS

### PRODUCT CONFIGURATION

8 x Transponders for 40GbE & 100GbE, QSFP28 to QSFP28.

### CLIENT AND LINE INTERFACES:

40G traffic:

DWDM PAM4 QSFP28

SR QSFP+

LR QSFP+

ER QSFP+

ACO QSFP+

100G Traffic:

100G SR4 QSFP28

100G LR4 QSFP28

100G CWDM4 QSFP28

100G ER4 QSFP28

100G ZR4 QSFP28

100G DR QSFP28

100G FR QSFP28

100G LR QSFP28

100G FRx QSFP28

100G LRx QSFP28

100G DWDM PAM4

10GbE and 25GbE Traffic:

Use QSFP28 to SFP/SFP+/SFP28 converter, CVR-QSFP28-SFP28

25G SR, LR, ER, ZR, DWDM

10G SR, LR, ER, ZR, DWDM, CWDM

32G SD, LD, DWDM

### VISUAL INDICATORS

Status LED Power & Alarm status

Client LED: Client Tx/Rx for each port

Line LED: Line Tx/Rx for each port

### MANAGEMENT

CLI, SSH, SNMPv2c, SNMPv3

NTP, SFTP, Syslog, RADIUS, TACACS+

### SOFTWARE UPGRADES

Traffic hitless software upgrades

### SW FEATURES

Client and Line in loop

Client and Line out loop

Link Loss Forwarding

Performance Monitoring

Ethernet PM on client and line ports for 100GbE

### DIMENSIONS

Size (WxDxH)

1.73 x 8.07 x 10.63"

44 x 205 x 270mm

Weight: 1.8 Kg / 4 lbs

### POWER CONSUMPTION

Typical consumption at 220VAC:

Normal operation: 66W

Max during power up: 108W

### ENVIRONMENTAL

Operating temp: 0°C to +45°C

Cooling: Front to back

Humidity: 5% to 85%

Altitude: 3000 m (10.000 ft)

NOTE. THE INFORMATION IN THIS DOCUMENT IS VALID FROM RELEASE R10.0.1